

Case study

NBS Edgware

Installation of temporary portable cleanroom to allow critical processes to continue during building upgrade work



Crane lifting the cabin over the trees into the car park

The details

Our role:
Design and Build as Principle Contractor

Scope:
M&E + Construction

Facility type:
Upgrade to tissue bank Grade B and C Facility and installation of temporary portable cleanroom

Floor area:
Portable unit 40m²

Contract value:
£250k

Programme:
3 months

NBS Edgware’s cleanroom facility was in need of a refit and upgrade to their Grade B rooms. Enbloc undertook the upgrade to the main building and installed a portable cleanroom in the car park area of the hospital to allow the NBS to continue their critical process in this temporary building.

This comprised of an unclassified link corridor from the existing building, Grade C pre change room, Grade B change and corridor leading to two fully working Grade B +50Pa rooms complete with safety cabinets. 70% of the temporary building was fitted out off site, including wall paneling, electrical, fire alarm, intruder alarms and HVAC. The unit was delivered to site on the back of a lorry and craned into the tight car park space.

After the main project was complete, the portable cleanroom and link corridor were removed and the car park restored to its original condition.




Portable cleanroom being delivered



Temporary cleanroom in situ

Case study

NBS Edgware

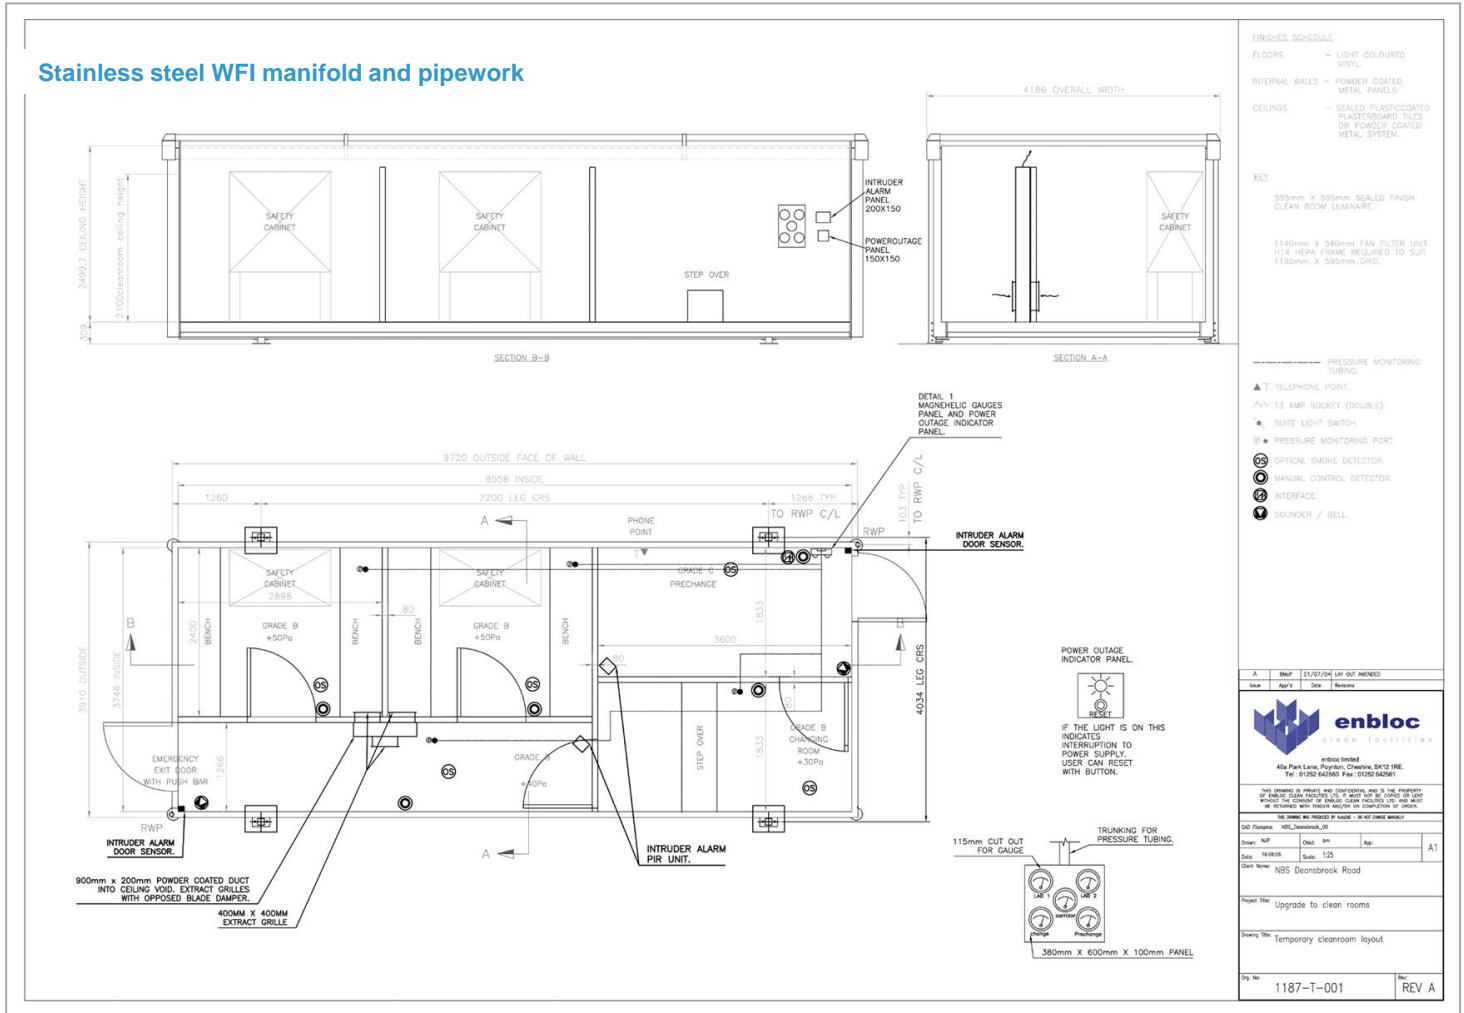

Key Points :

- Custom made to meet client’s exacting requirements
- Full turnkey package cost effective solution

For more information on the clean facilities that Enbloc can offer please visit our website www.enbloc-cleanrooms.com or contact our head office at:

Enbloc Ltd
 Unit 2, Pale Lane
 Hook
 Hampshire
 RG27 8DH

+44 (0)1252 626229

sales@enbloc-cleanrooms.com